



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

B.Tech V Semester

20EC09 – DIGITAL COMMUNICATIONS

Course Educational Objective: This course provides the knowledge on different digital modulation techniques. The course provides different concepts on information theory, block codes and convolution codes. It gives the methods of optimum receivers for digital communication systems and performance of probability of error for digital modulation techniques.

Course Outcomes (COs): At the end of the course, students will be able to

CO1: Understand the concepts of digital communication system (Understand – L2)

CO2: Analyze the Baseband and Pass band digital modulation techniques (Analyze – L4)

CO3 :Examine the optimum reception and probability of error of digital modulation(Apply – L3)

CO4:Apply source coding and error control coding techniques in digital communication process(Apply – L3)



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

UNIT – I

Pulse Digital Modulation: Elements of a Digital Communication System, Sampling and Quantization of signals- Quantization noise, Pulse Digital Modulation Systems: Pulse Code Modulation(PCM) System, Encoding, Regenerative repeaters, Decoding, Reconstruction, effect of noise in PCM-Calculation of output SNR in PCM; Need for non-uniform quantization-Companding- μ -law, A-law; Differential Pulse Code Modulation; Delta Modulation; Adaptive Delta Modulation.



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

➤ Elements of a Digital Communication System,

➤ Sampling

➤ Quantization of Digital signals

Introduction– Uniform Quantization

Quantization noise

➤ Pulse Code Modulation(PCM) System

Block diagram of Tx-Rx

SNR in PCM system(output)

➤ Non -uniform quantization

Need for non-uniform quantization

Companding- μ -law, A-law

➤ Differential Pulse Code Modulation

Delta Modulation- Drawbacks of DM

Adaptive Delta Modulation

Department of Electronics and Communication Engineering



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

why digital :-

- * to reduce the size of the data to be transmitted.
- * To perform error detection & error correction.
- * To enable security.
- * To provide mixing of signals & data.



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

The Necessity of Digitization

The conventional methods of communication used analog signals for long distance communications, which suffer from many losses such as distortion, interference, and other losses including security breach. In order to overcome these problems, the signals are digitized using different techniques. The digitized signals allow the communication to be more clear and accurate without losses.

Advantages of Digital Communication

There are many advantages of digital communication over analog communication

1. The effect of distortion, noise, and interference is much less in digital signals as they are less affected.
2. Digital circuits are more reliable & easy to design and cheaper than analog circuits.
3. The hardware implementation in digital circuits, is more flexible than analog.
4. Signal processing functions such as encryption and compression are employed in digital circuits to maintain the secrecy of the information.
5. The probability of error occurrence is reduced by employing error detecting and error correcting codes
6. Spread spectrum technique is used to avoid signal jamming.



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING


(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

MODEL OF COMMUNICATION SYSTEM

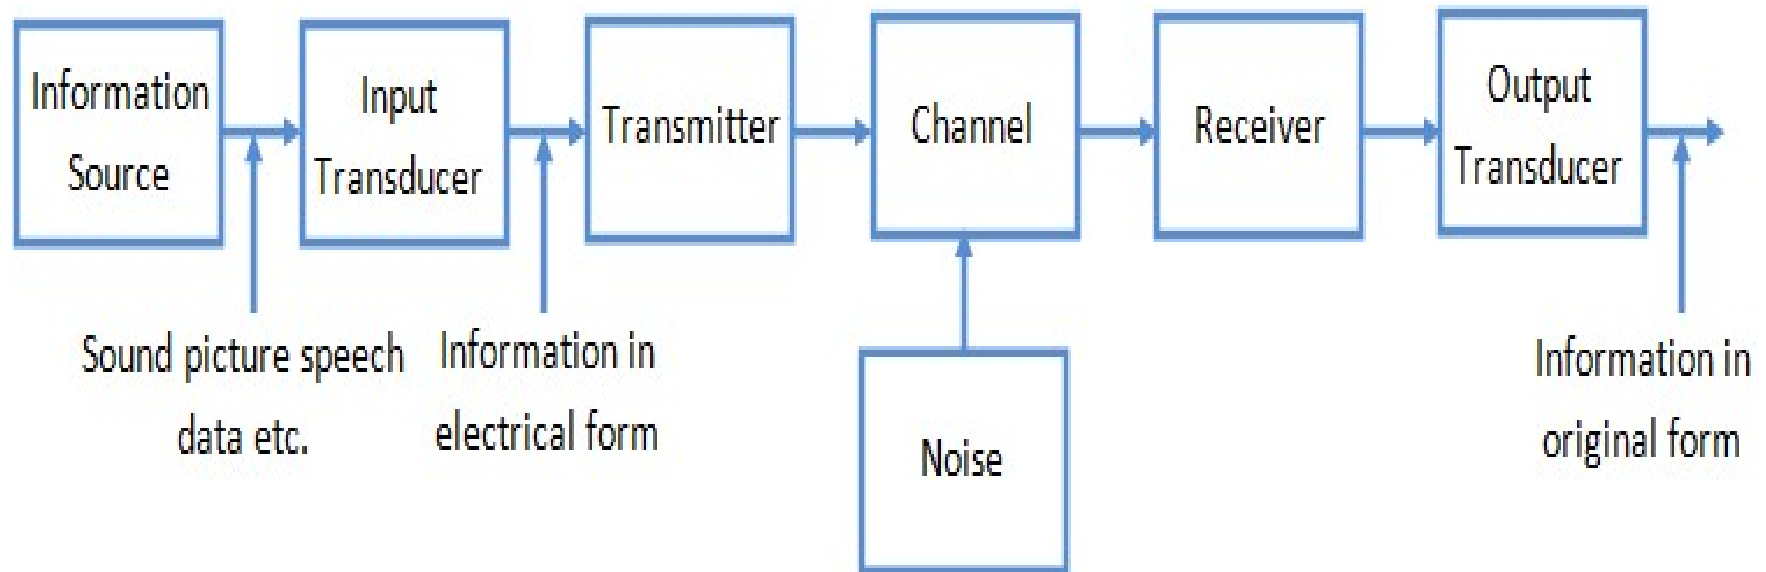



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

The transmission of information is called communication.

- Every communication has three essential elements : transmitter, channel and receiver The purpose of transmitter is to convert into suitable form of signal that can transmitted through the channel.
- The channel is central to operation of a communication System. The information - carrying capacity of a communication system is proportional to the channel bandwidth.
- If the o/p of the information source is a non electric signal then a transducer convert it into electric form before it pass through the channel. Moreover, noise is introduced in channel so receiver reconstruct it and send the information to user for.







LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

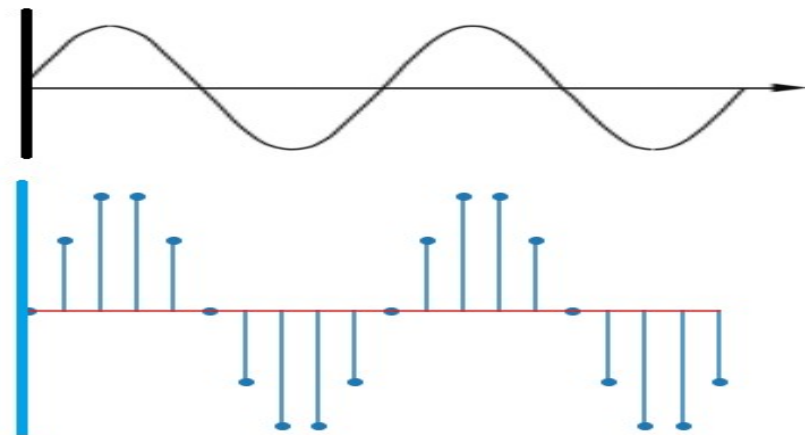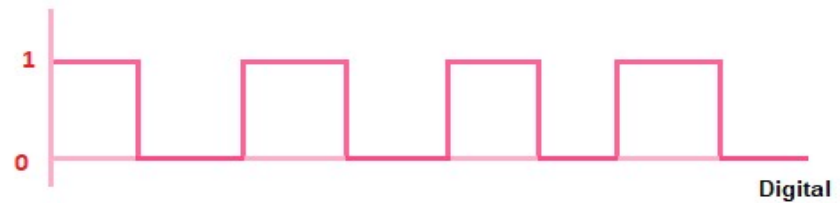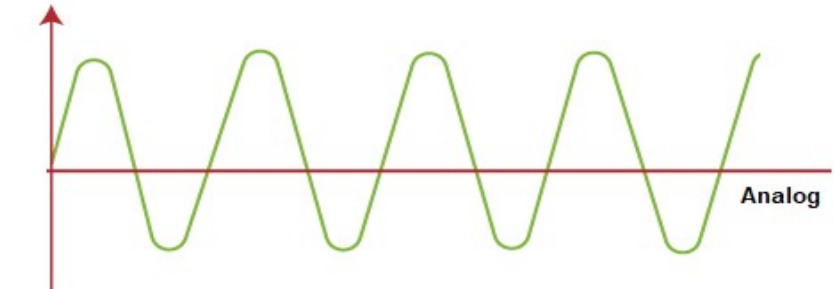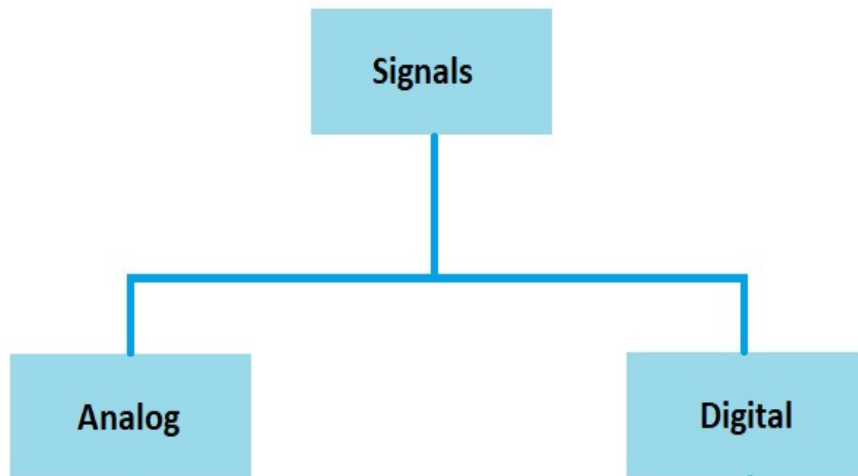




LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

Classification of Modulation

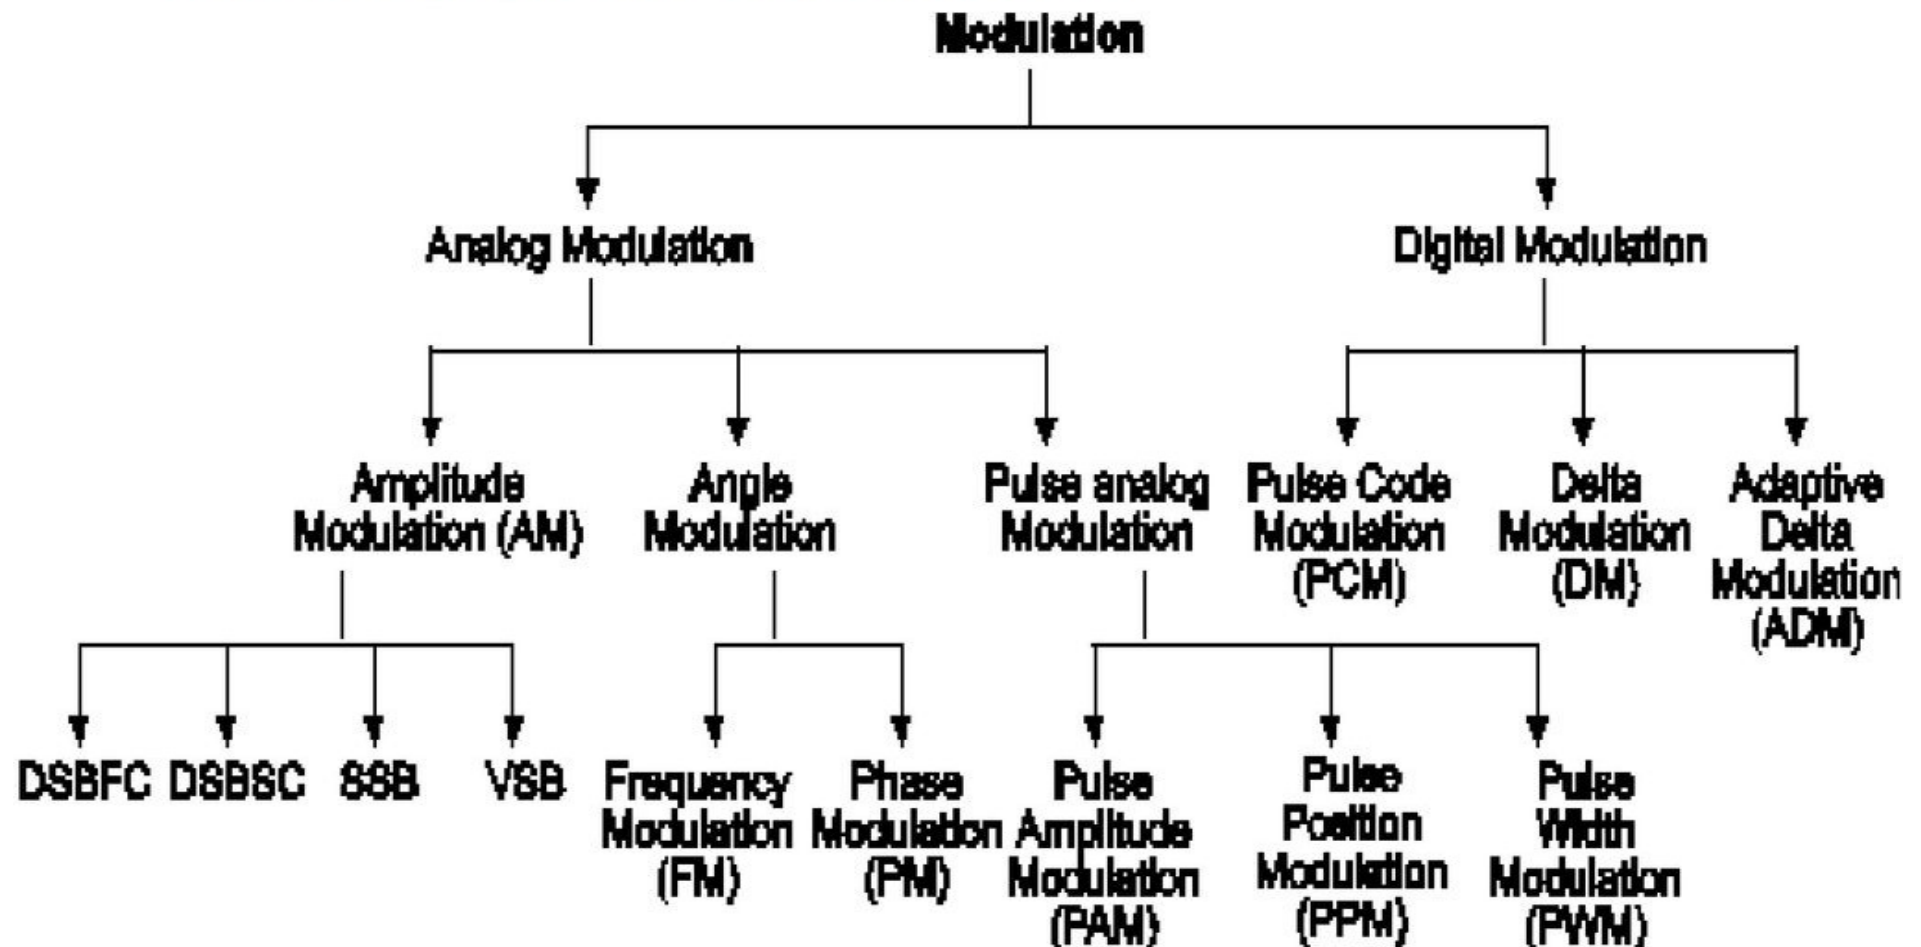



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Sr. No	Modulation Techniques	Type	Notation
01	Analog Modulation Techniques	(i) Amplitude Modulation (ii) Frequency Modulation (iii) Phase Modulation	A.M. F.M. P.M.
02	Digital Modulation Techniques	(i) Amplitude Shift Keying (ii) Frequency Shift Keying (iii) Phase Shift Keying	A.S.K. F.S.K. P.S.K.



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Block diagram of Digital communication Systems

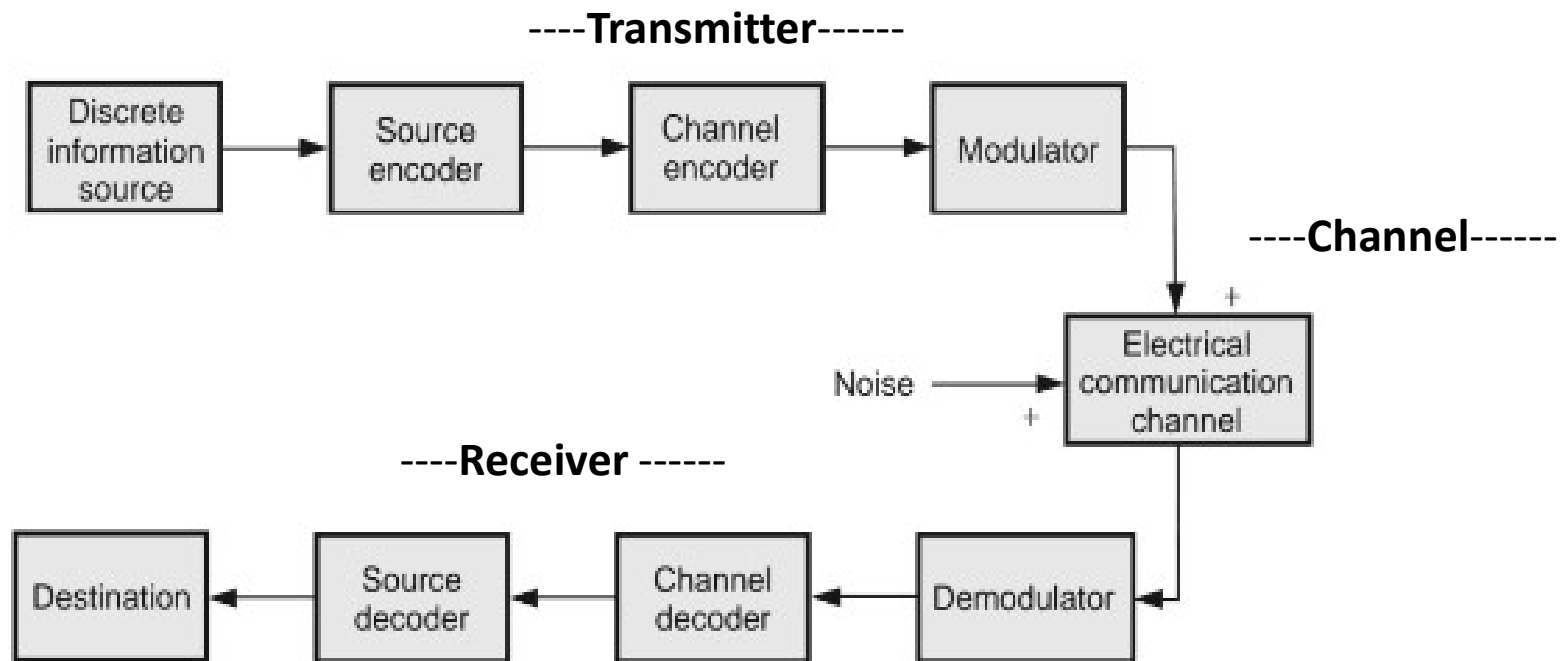


Fig. 1.1.1 Basic digital communication system



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

In the above **diagram 3** basic signal processing operations

1.Source coding (source encoder & decoder)

2.Channel coding (Channel encoder & decoder)

3.Modulation

Information Source

- The information source generates the message signal to be transmitted. In case of analog communication, the information source is analog. In case of digital communication, the information source produces a message signal which is not continuously varying with time. Rather the message signal is intermittent with respect to time.
- The examples of discrete information sources are data from computers, teletype etc. Even the message containing text is also discrete.
- The analog signal can be converted to discrete signal by sampling and quantization. In sampling, the analog signal is chopped off at regular time intervals. Those chopped samples form a discrete signal.



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Source Encoder and Decoder

- The symbols produced by the information source are given to the source encoder. These symbols cannot be transmitted directly. They are first converted into digital form (i.e. Binary sequence of 1's and 0's) by the source encoder. Every binary '1' and '0' is called a bit. The group of bits is called a codeword.
- The source encoder assigns codewords to the symbols. For every distinct symbol there is a unique codeword. The codeword can be of 4, 8, 16 or 32 bits length. As the number of bits are increased in each codeword, the symbols that can be represented are increased.

For example, 8 bits will have $2^8 = 256$ distinct codewords. Therefore 8 bits can be used to represent 256 symbols, 16 bits can represent $2^{16} = 65536$ symbols and so on.

- In both of the above examples the number of bits in every codeword is same throughout. That is 8 in first case and 16 in next case respectively. This is called fixed length coding. Fixed length coding is efficient only if all the symbols occur with equal probabilities in a statistically independent sequence.



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Ex:- ANTANI - Message

Fixed length coding

Message \rightarrow ANTANI

Source Alphabets $\rightarrow \{A, N, T, I\}$

No. of Symbols $\rightarrow 4$

No. of bits assigned $\rightarrow 2$ for each Symbol

Total no. of bits $\rightarrow 4 \times 2 = 8$ bits

ie more Probable occurrence — less no of bits assigned
less " " — more " "

Variable length coding

ANTANI

$\{A, N, T, I\}$

More Probable Symbol $\rightarrow A, N$.

No. of bits assigned $\rightarrow A \rightarrow 0$

$N \rightarrow 1$

$T \rightarrow 01$

$I \rightarrow 10$

6-bits



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Channel Encoder and Decoder

- To reduce the effect of channel noise
- To provide reliable communication over noisy channel
- Introducing redundancy in the channel encoding in prescribed format it can reconstruct the original signal as accurately as possible at the decoder output.

Key features of the system is → Coding rate, Error detection & Error Correction Capabilities, Complexity of Encoder & Decoder.



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Important parameters

- 1) **Block size** : This gives the maximum number of distinct codewords that can be represented by the source encoder. It depends upon maximum number of bits in the codeword. For example, the block size of 8 bits source encoder will have $2^8 = 256$ codewords.
- 2) **Codeword length** : This is the number of bits used to represent each codeword. For example, if 8 bits are assigned to every codeword, then codeword length is 8 bits.
- 3) **Average data rate** : It is the output bits per second from the source encoder. The source encoder assigns multiple number of bits to every input symbol. Therefore the data rate is normally higher than the symbol rate. For example let us consider that the symbols are given to the source encoder at the rate of 10 symbols/sec and the length of codeword is 8 bits. Then the output data rate from the source encoder will be,

$$\begin{aligned}\text{Data rate} &= \text{Symbol rate} \times \text{Codeword length} \\ &= 10 \times 8 = 80 \text{ bits/sec}\end{aligned}$$

Information rate is the minimum number of bits per second needed to convey information from source to destination as stated earlier. Therefore optimum data



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Sampling theorem (or Nyquist Criterion): the sampling is performed at a proper rate, no info is lost about the original signal and it can be properly reconstructed “If a signal is sampled at a rate at least, but not exactly equal to twice the maximum frequency of the signal, then the waveform can be exactly reconstructed from the samples without any distortion”

Sampling frequency $f_s \geq f_{\max}$

The minimum sampling rate of $(2W)$ samples per second, for an analog signal bandwidth of W Hz, is called the Nyquist rate.

Suppose that a signal is band-limited with no frequency components higher than W Hertz. That means, W is the highest frequency. For such a signal, for effective reproduction of the original signal, the sampling rate should be twice the highest frequency. **$f_s = 2W$**

where f_s is the sampling frequency

W is the highest frequency



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Sampling is the processes of converting continuous by taking the “samples” at discrete-time intervals

Sampling interval: – The time that separates sampling points (interval b/w samples),

Analog-to-digital conversion is (basically) a 2 step process: –

Sampling - Convert from continuous-time analog signal – Is obtained by taking the “samples” of $x_a(t)$ at discrete-time intervals, T_s

Quantization – Convert from discrete-time continuous valued signal

Sampling Rate (or sampling frequency f_s): The rate at which the signal is sampled, expressed as the number of samples per second reciprocal of the sampling interval),
 $1/T_s = f_s$



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)


Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Ideal Sampling (or Impulse Sampling)


is accomplished by the multiplication of the signal $x(t)$ by the uniform train of impulses (comb function)

Consider the instantaneous sampling of the analog signal $x(t)$

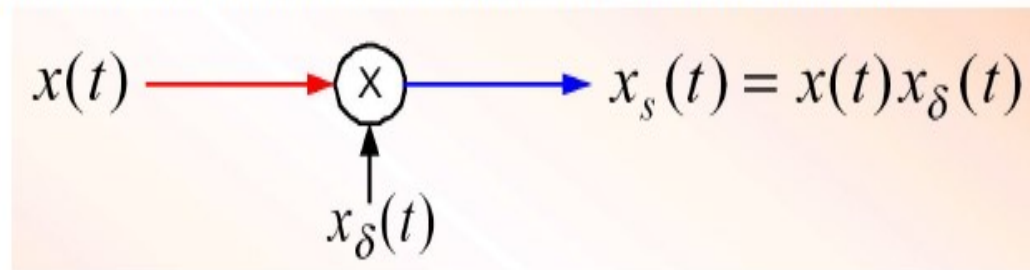

Train of impulse functions select sample values at regular intervals

$$x_s(t) = x(t) \sum_{n=-\infty}^{\infty} \delta(t - nT_s)$$

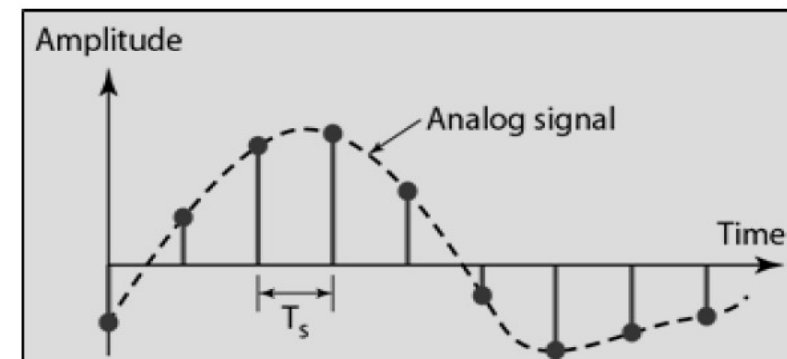

Ideal Sampling



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)


Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Another technique known as *flat top sampling*

Flat-top sampling – a pulse of short width with varying amplitude with flat tops

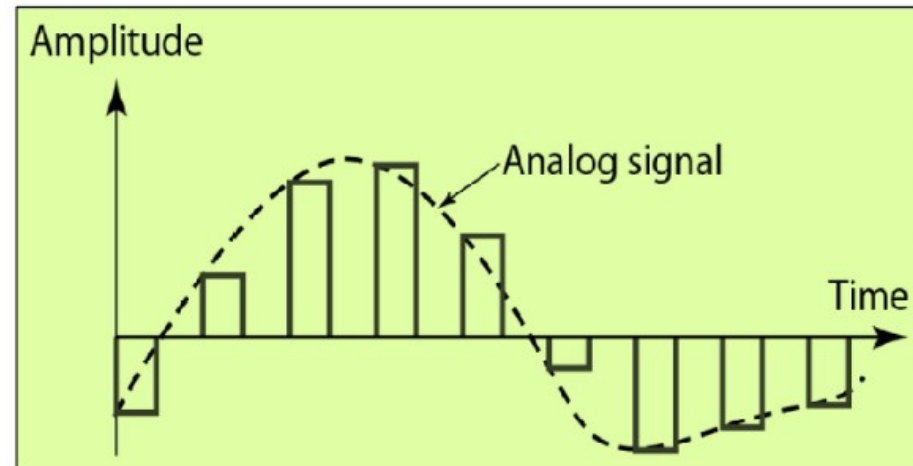



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Quantization The process of transforming
Sampled amplitude values of a message signal
into a discrete amplitude value is referred to as
Quantization



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India

Baseband vs. Passband Communication Systems Communication systems can be classified into two groups depending on the range of frequencies they use to transmit information. These communication systems are classified into BASEBAND or PASSBAND system

Modulation and Demodulation The process of shifting the baseband signal to passband range for transmission is known as MODULATION and the process of shifting the passband signal to baseband frequency range at the receiver is known as DEMODULATION

**DIGITAL BASE
BAND MODULATION
TECHNIQUES**



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India



LAKIREDDY BALI REDDY COLLEGE OF ENGINEERING

(AUTONOMOUS)

Accredited by NAAC & NBA (CSE, IT, ECE, EEE & ME)

Approved by AICTE, New Delhi and Affiliated to JNTUK, Kakinada

L.B.Reddy Nagar, Mylavaram-521230, Krishna Dist, Andhra Pradesh, India